

Supplementary information

$\text{Na}_{3.12}\text{Fe}_{2.44}(\text{P}_2\text{O}_7)_2$ /multi-walled carbon nanotube composite as a cathode material for sodium-ion batteries

Yubin Niu^{1,2}, Maowen Xu^{1,2,*}, Chuanjun Cheng^{1,2}, ShuJuan Bao^{1,2}, Junke Hou^{1,2}, Sangui Liu^{1,2},
Fenglian Yi^{1,2}, Hong He¹, Chang Ming Li^{1,2,*}

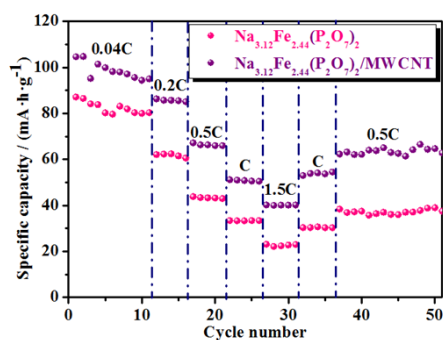


Figure S1. Performance of $\text{Na}_{3.12}\text{Fe}_{2.44}(\text{P}_2\text{O}_7)_2$ and $\text{Na}_{3.12}\text{Fe}_{2.44}(\text{P}_2\text{O}_7)_2$ / MWCNT at various rates from 0.04 C to 1.5 C.