

Supporting information for

Nanohybrids of organo-modified layered double hydroxides and polyurethanes with enhanced mechanical, damping and UV absorption properties

Hao Zhang,^{a,†} Jun Zhang,^{a,†} Rongping Yun,^a Zhiguo Jiang,^{*a} Haimei Liu,^{* a,c} and Dongpeng Yan^{*ab}

^a State Key Laboratory of Chemical Resource Engineering, Beijing University of Chemical Technology, Box 98, Beijing 100029, P.R. China; yandp@bnu.edu.cn; jiangking@vip.vip.com; liuhm@shiep.edu.cn

^b Key Laboratory of Theoretical and Computational Photochemistry, Ministry of Education, College of Chemistry, Beijing Normal University, Beijing 100875 P.R. China

^c College of Environmental and Chemical Engineering, Shanghai University of Electric Power, Shanghai, 200090, P. R. China

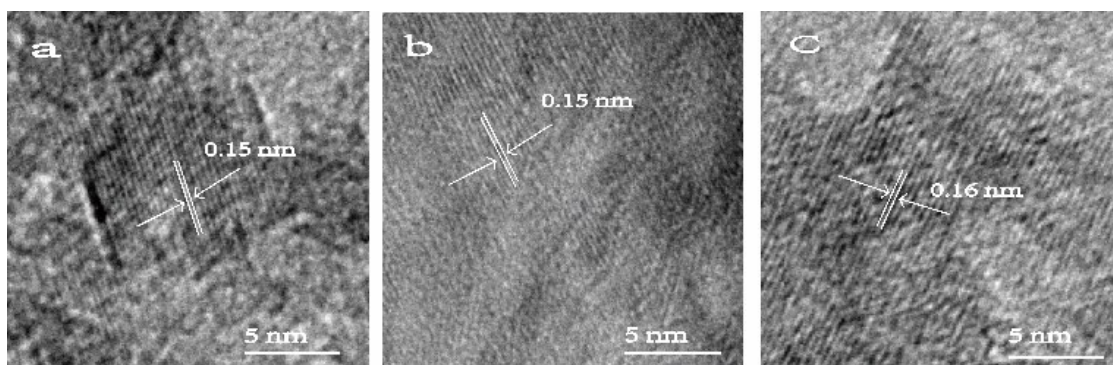


Figure S1. HRTEM images for (a) MgAl-NO₃-LDH, (b) DS-LDH, (c) APS-DS-LDH.

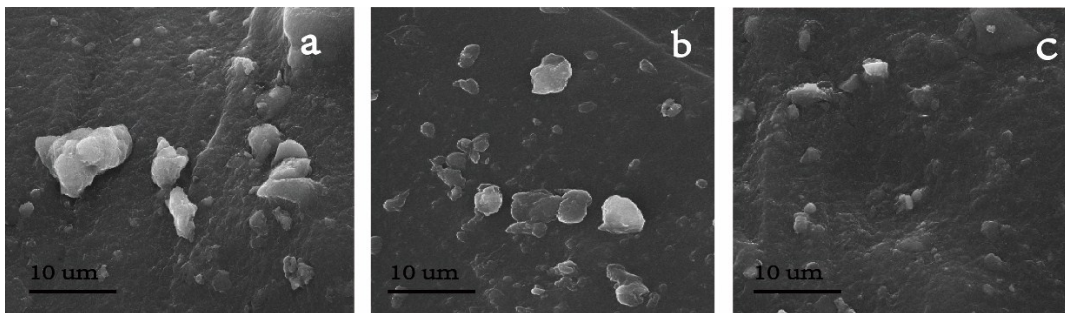


Figure S2. SEM images for (a) PM3, (b) PD3, (c) PA3.

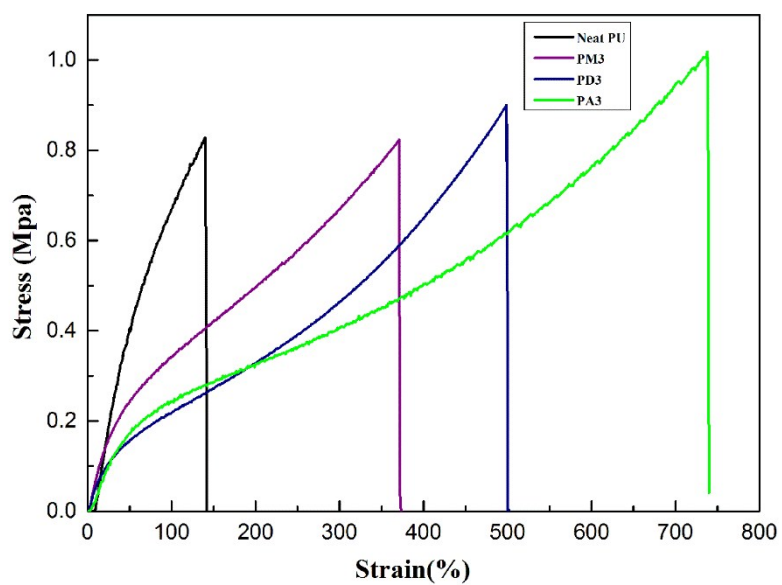


Figure S3. Stain-stress curves of neat PU, PM3, PD3, and PA3.