

Electronic supplementary information (ESI)

Cell adhesion on glassy scaffolds with different mechanical response

Shinichiro Shimomura,^a Hisao Matsuno,^{*,a,b} Kazuaki Sanada,^c and Keiji Tanaka^{*,a,b}

^a Department of Applied Chemistry, Kyushu University, Fukuoka 819-0395, Japan

^b International Institute for Carbon-Neutral Energy Research (WPI-I2CNER), Kyushu University, Fukuoka 819-0395, Japan

^c Department of Mechanical Systems Engineering, Toyama Prefectural University, Imizu 939-0398, Japan

*To whom correspondence should be addressed

FAX: +81-92-802-2880 TEL: +81-92-802-2878

E-mail: h-matsuno@cstf.kyushu-u.ac.jp and k-tanaka@cstf.kyushu-u.ac.jp

Static water contact angles.

Static water contact angles were examined for poly(methyl methacrylate)/polyisoprene (PMMA/PI) bilayer films and PMMA monolayer films, respectively, with a different thickness of each PMMA layer (d_{PMMA}). Fig. S1 shows the data. The averaged water contact angle values were approximately 77° and these values were almost the same regardless of the configuration and the d_{PMMA} of the films.

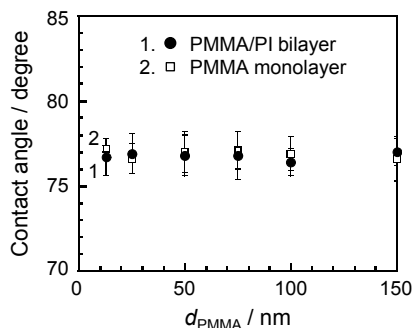


Fig. S1 Water contact angles for the PMMA/PI bilayer and PMMA monolayer films, respectively.