

Fused Silver Nanowires with Silica Sol Nanoparticles for Smooth, Flexible, Electrically and Highly Stable Transparent Electrodes

Shengchi Bai[‡], Haifeng Wang^{§,*}, Hui Yang^{‡,§}, He Zhang[§], Tianrui Chen[§], Xingzhong Guo^{‡,*}

[‡] *State Key Laboratory of Silicon Materials, School of Materials Science and Engineering,
Zhejiang University, Hangzhou, China, 310027;*

[§] *Zhejiang-California International Nanosystems Institute, Zhejiang University, Hangzhou,
China, 310058.*

**Corresponding author: whf5560@163.com (H. Wang); msewj01@zju.edu.cn (X. Guo)*

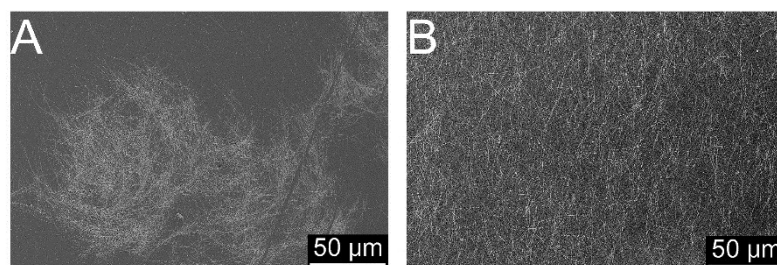


Figure S1 TCE fabricated with AgNW ink without HPMC (A) and with HPMC (B).