

Supplementary Information

One-pot pyro synthesis of a nanosized-LiMn₂O₄/C cathode with enhanced lithium storage properties

Jeonggeun Jo^a, Sukyeung Nam^a, Seungmi Han^a, Vinod Mathew^a, Muhammad Hilmy Alfaruqi^a,
Duong Tung Pham^a, Seokhun Kim^a, Sohyun Park^a, Sunhyun Park^a and Jaekook Kim^{a*}

^aDepartment of Materials Science and Engineering, Chonnam National University, 300
Yongbong-dong, Bukgu, Gwangju 61186, Republic of Korea

*Corresponding author. Tel: +82-62-530-1703; Fax: +82-62-530-1699.

E-mail address: jaekook@chonnam.ac.kr (Jaekook Kim)

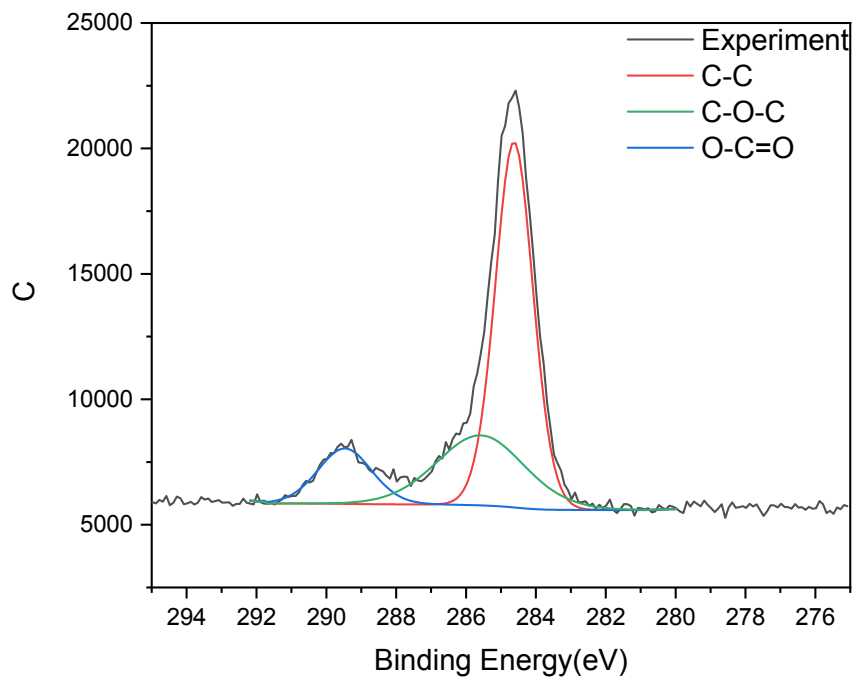


Fig. S1 C1s XPS spectra for the LMO/C sample prepared by the pyro-synthesis method.

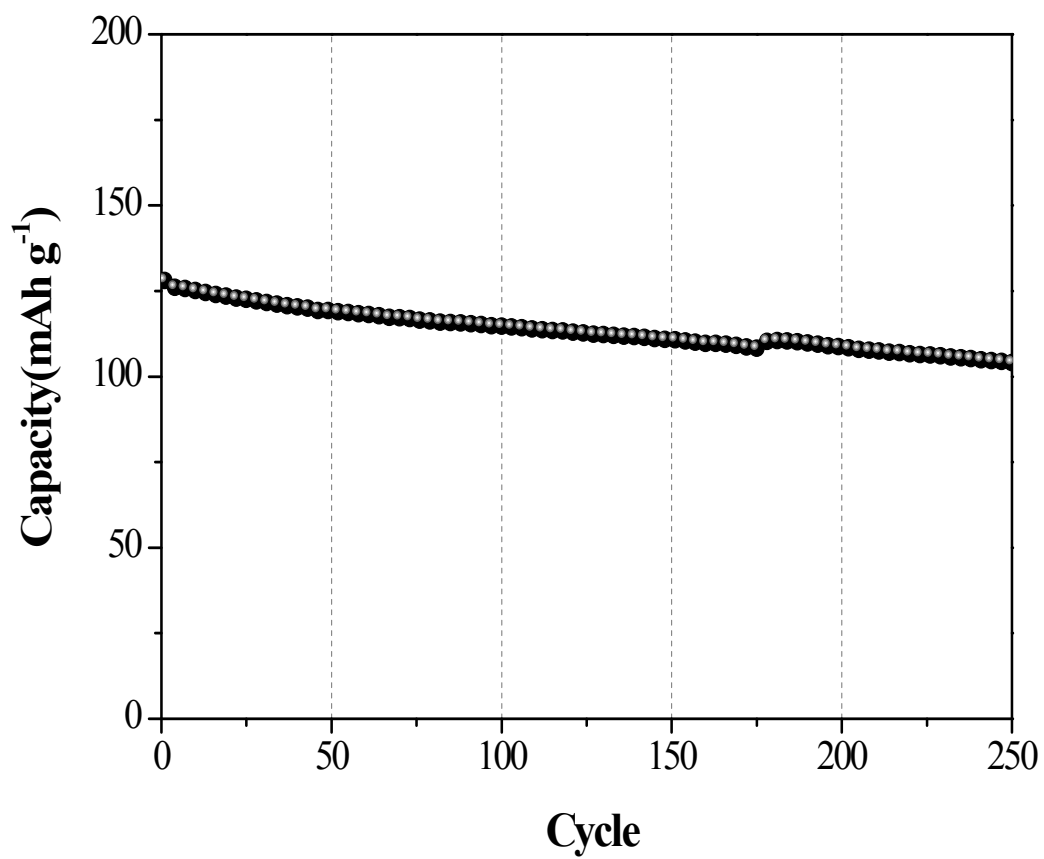


Fig. S2 Cycle performance of the nanosized LMO/C sample prepared by pyro synthesis at 1C current density in the voltage range 3.0 to 4.3 V.