

Supporting information

Uniform few-layered carbon coating derived from the self-assembled carboxylate monolayers capable of promoting the rate properties and durability of commercial TiO₂

Meng Huang^a, Hui-Ling Zhu^b, Yong-Xin Qi^a, Ning Lun^{*a} and Yu-Jun Bai^{*a}

^aKey Laboratory for Liquid-Solid Structural Evolution & Processing of Materials (Ministry of Education), Shandong University, Jinan 250061, PR China

^bSchool of Materials Science and Engineering, Shandong University of Science and Technology, Qingdao, 266590, PR China

*Tel/Fax: +86 0531 88392315. E-mail: byj97@sdu.edu.cn (Y.-J. Bai), lunning66@sdu.edu.cn

(N. Lun)

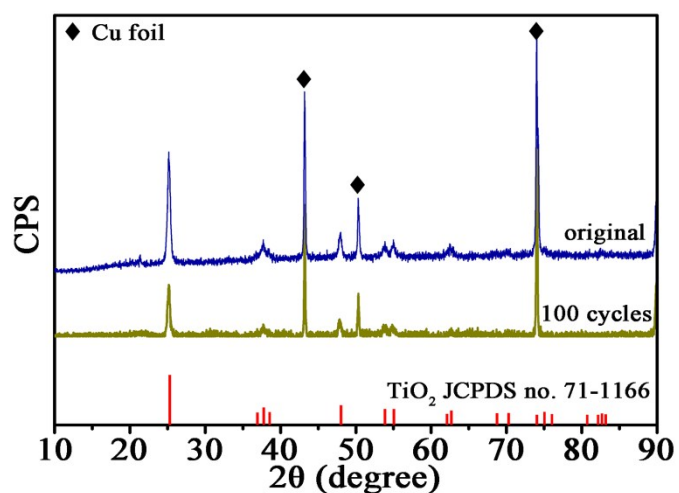


Fig. S1 XRD patterns of TiO₂/C-30 before cycling and after 100 cycles at 0.1 A g⁻¹.