

Supporting Information

Sb&Sb₂O₃@C-Enhanced Flexible Carbon Cloth as an Advanced Self-supporting Anode for Sodium-ion Batteries

Shu-Zhi Cao,^a Ying Su,^a He-yang Zhang,^a Zhen-Yi Gu,^b Xu Yang,^c Bo Zhao,^a Xing-Long Wu,^{*abc} and Guang Wang^{*a}

^a Faculty of Chemistry, Northeast Normal University, Changchun, Jilin, 130024, P. R. China.

^b Key Laboratory for UV Light-Emitting Materials and Technology of Ministry of Education, Northeast Normal University, Changchun, Jilin 130024, P. R. China.

^c National & Local United Engineering Laboratory for Power Batteries, Faculty of Chemistry, Northeast Normal University, Changchun, Jilin 130024, P. R. China.

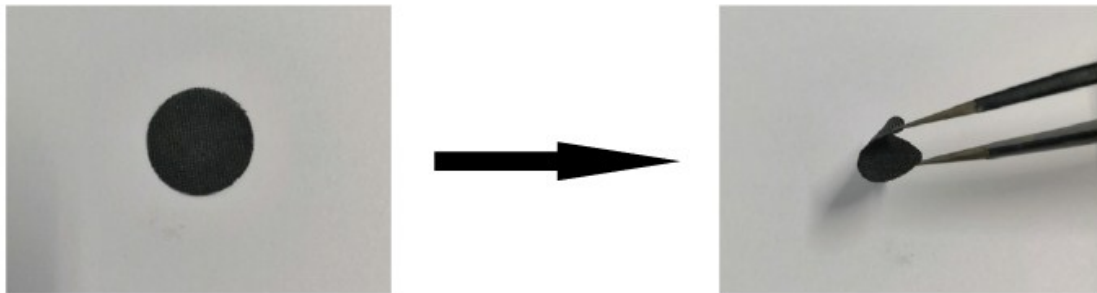


Figure S1. Digital photographs of Sb&Sb₂O₃@C/CC electrode materials. The left is well-prepared Sb&Sb₂O₃@C/CC and the right is the electrode under bending condition.

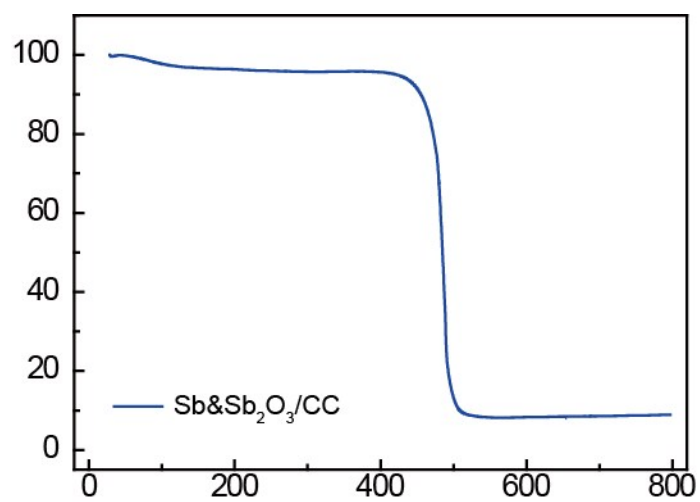


Figure S2. TG curve of Sb&Sb₂O₃/CC

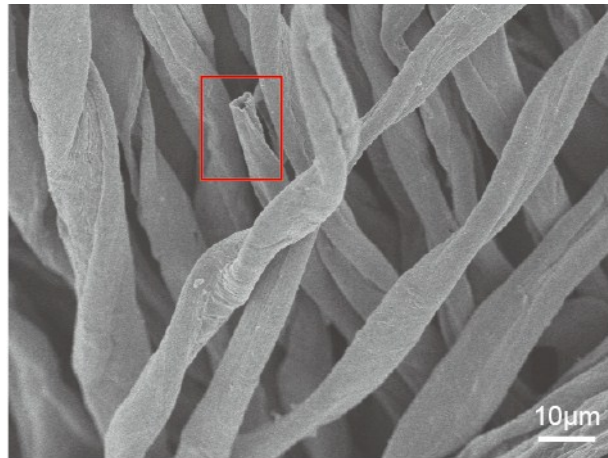


Figure S3. SEM of CC. The red frame in the diagram shows that carbon fibers are hollow structure.

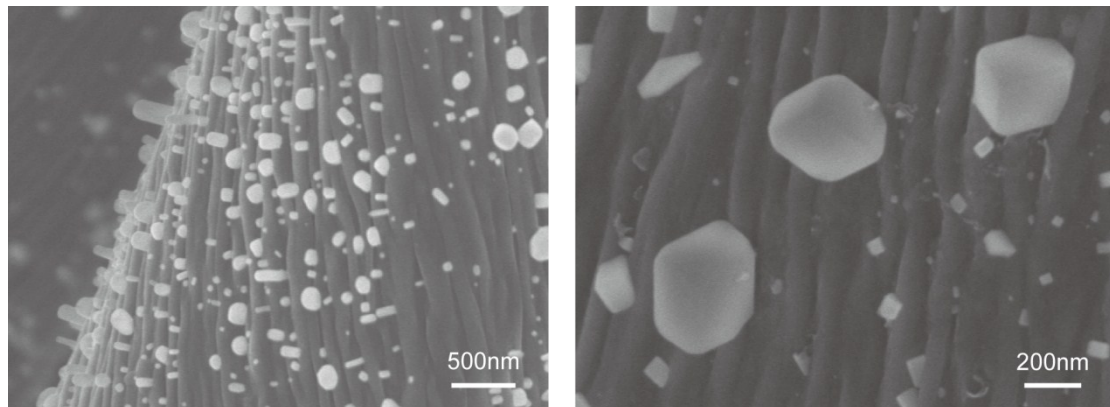


Figure S4. SEM of Sb&Sb₂O₃/CC

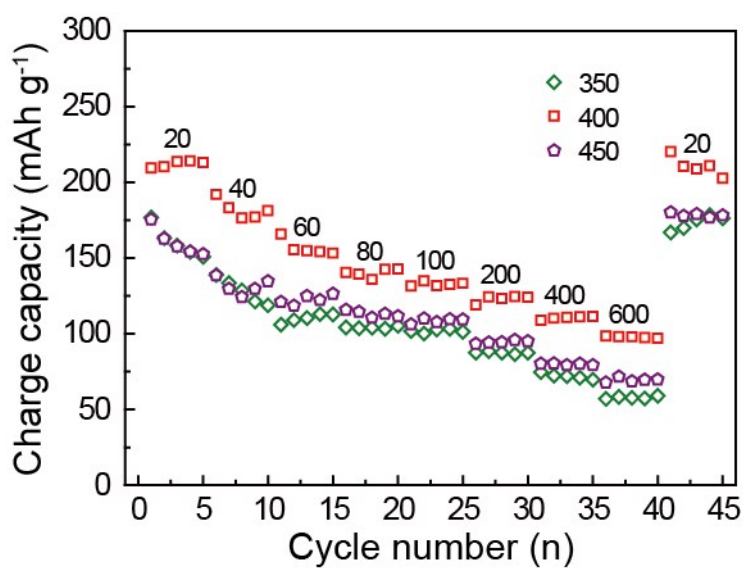


Figure S5. Rate performance of Sb&Sb₂O₃@C/CC electrodes at different annealing temperatures (current density: 20 to 600 mA g⁻¹).

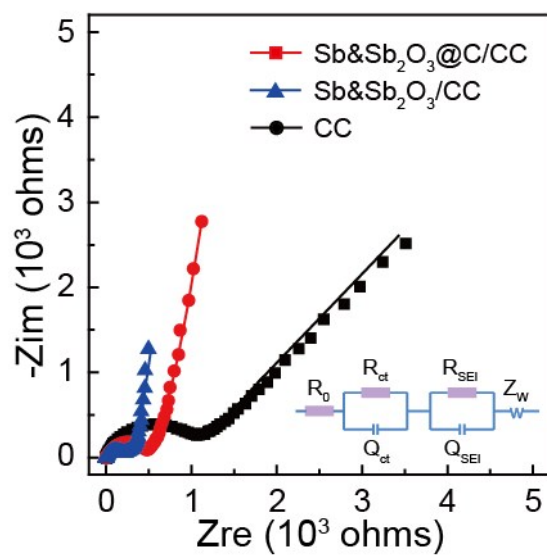


Figure S6. Nyquist plots of Sb&Sb₂O₃@C/CC, Sb&Sb₂O₃/CC and CC electrodes.