

ELECTRONIC SUPPLEMENTARY INFORMATION

One-step preparation and characterization of a nanostructured hybrid electrode material via microwave energy-based approach

Selcuk Poyraz¹

¹Department of Textile Engineering, Faculty of Engineering, Adiyaman University, Adiyaman 02040, TURKEY
E-mail: spoyraz@adiyaman.edu.tr

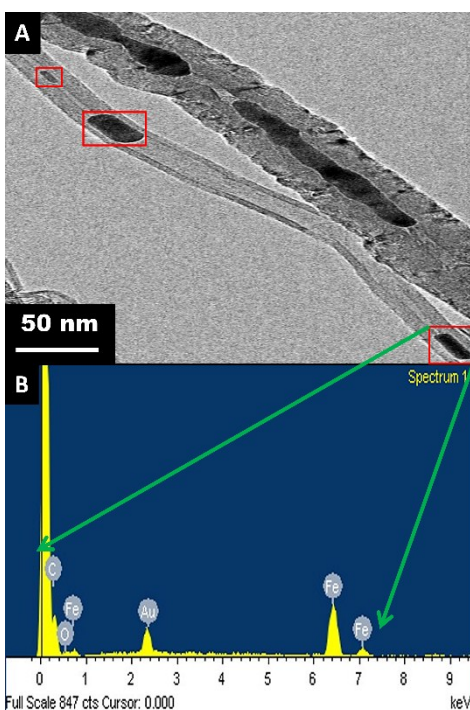


Figure S1. EDX spectrum of the oxidized Fe catalyst NPs (indicated in the red rectangular areas) encapsulated inside CNTs' hollow stems in the as-prepared HEMs

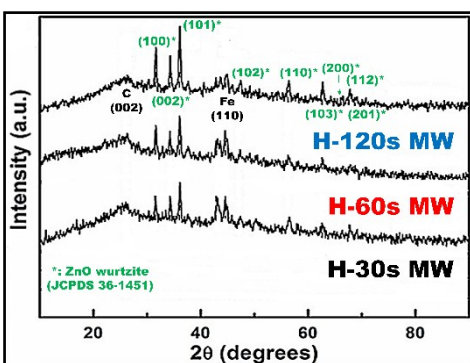


Figure S2. XRD spectra of the as-prepared HEMs