

Tailoring the structure and property of epoxy-polyurea vitrimers via controllable network reconfiguration

Fance Ji^b, Yiming Zhou^{*, b}, Yuming Yang^{*, a}

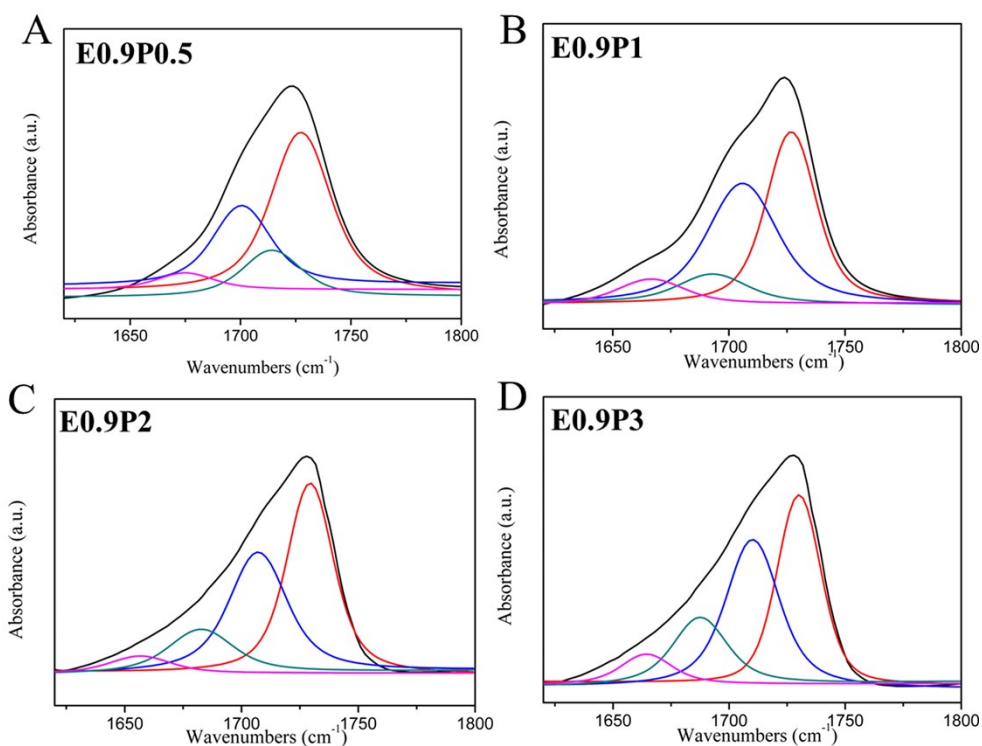


Fig.S1 FT-IR spectrum curves for epoxy-polyurea vitrimers after the Gauss-Lorentz fitting

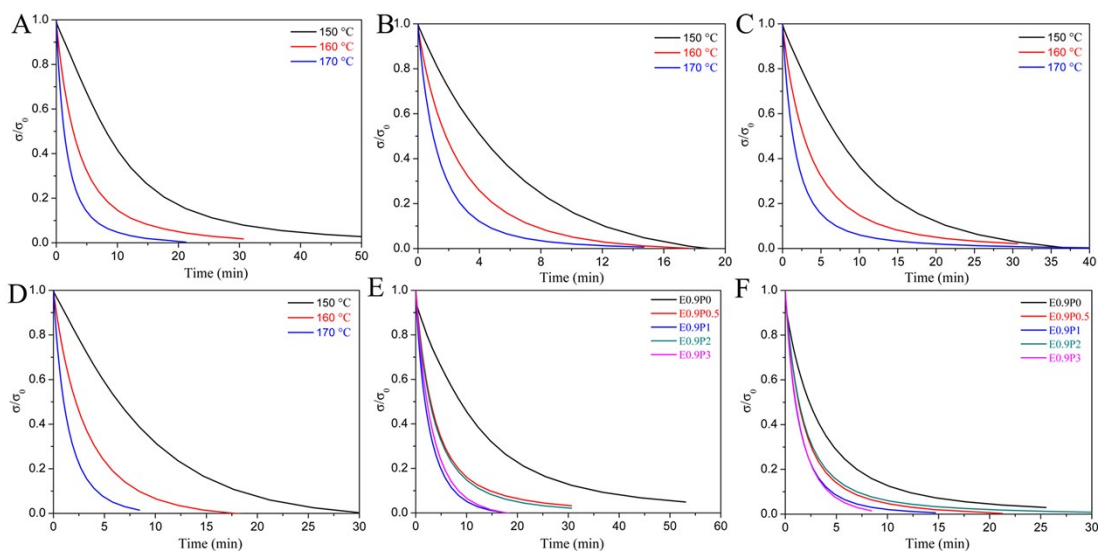


Fig.S2 Stress relaxation curves of $E_{0.9}P_{0.5}$, $E_{0.9}P_1$, $E_{0.9}P_2$, and $E_{0.9}P_3$ at different temperature (A-D). Comparison of the stress relaxation curves for epoxy-polyurea vitrimers with different compositions at 160 and 170 °C (E, F).

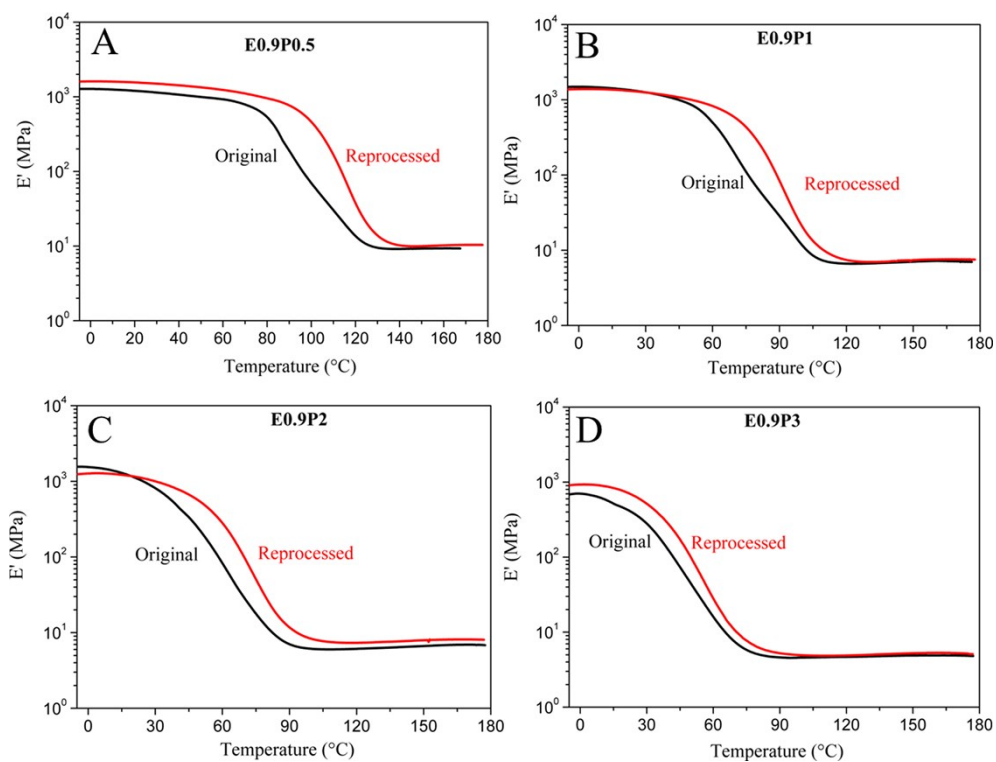


Fig.S3 Storage modulus (E') versus temperature curves of epoxy-polyurea vitrimers before and after reprocessing.