

SUPPLEMENTARY INFORMATION

Star polymers -TiO₂ nanohybrids to effectively modify surface of PMMA dielectric layer for solution processable OFETs

Katarzyna Budzalek^a, Hangjun Ding^b, Lukasz Janasz^a, Aleksandra Wypych-Puszkarz^a, Onur Cetinkaya^a, Joanna Pietrasik^c, Marcin Kozanecki^a, Jacek Ulanski^a, Krzysztof Matyjaszewski^{*a,b}

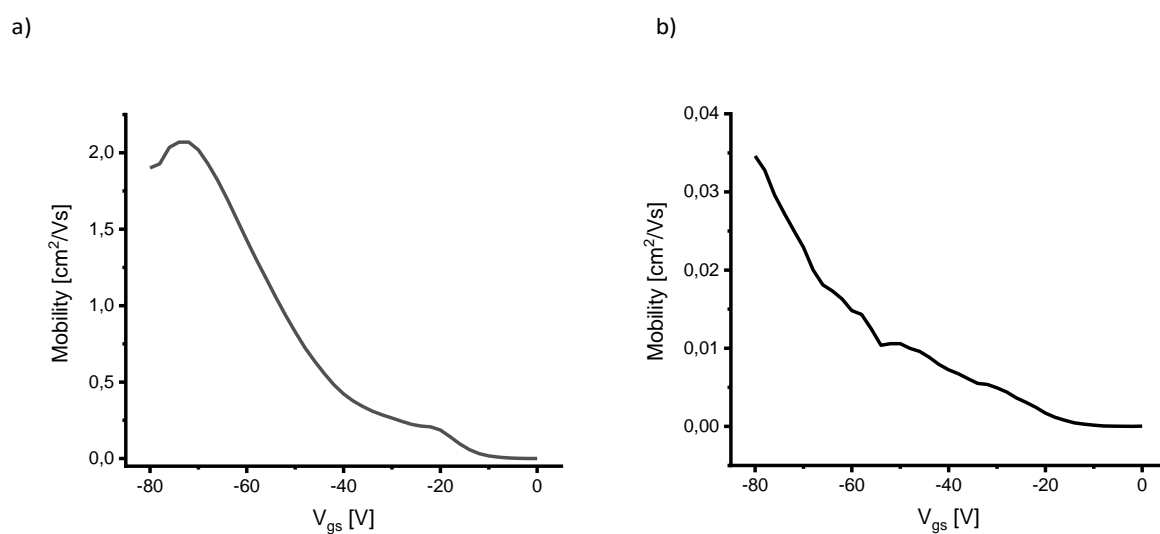


Figure S1. OFET mobility vs. gate voltage dependences for devices with different dielectric layer: a) PMMA containing TiO₂@PSAN-*b*-PAA-PDVB nanohybrids; b) neat PMMA layer

^a Department of Molecular Physics, Faculty of Chemistry, Lodz University of Technology, Zeromskiego 116, 90-924 Lodz, Poland.

^b Department of Chemistry, Carnegie Mellon University, 5000 Forbes Avenue, Pittsburgh, PA 15213, USA.

^c Institute of Polymer and Dye Technology, Faculty of Chemistry, Lodz University of Technology, Stefanowskiego 12/16, 90-924 Lodz, Poland

See DOI: 10.1039/x0xx00000x