

Supplemental information

Simultaneous removal of organic matter and nitrogen compounds by partitioned aeration in a 226L-scale microbial fuel cell

Taiki Yamanea,[†], Naoko Yoshida,^{†,*} and Mari Sugiokaa

^a Department of Civil and Environmental Engineering, Nagoya Institute of Technology (Nitech), Gokiso-Cho, Showa-Ku, Nagoya, Aichi, Japan.


[†]These authors contributed equally to this work.

*Corresponding author: yoshida.naoko@nitech.ac.jp


Supplemental Figure S1. Comparison of BOD removal by MFCs with and without partial aeration.

Supplemental Figure S2. Relationships between CE and the three parameters: HRT (A), BODIN (B), and BODEF (C).


Supplemental Figure S3. Comparison of CE in MFCs with and without partial aeration.

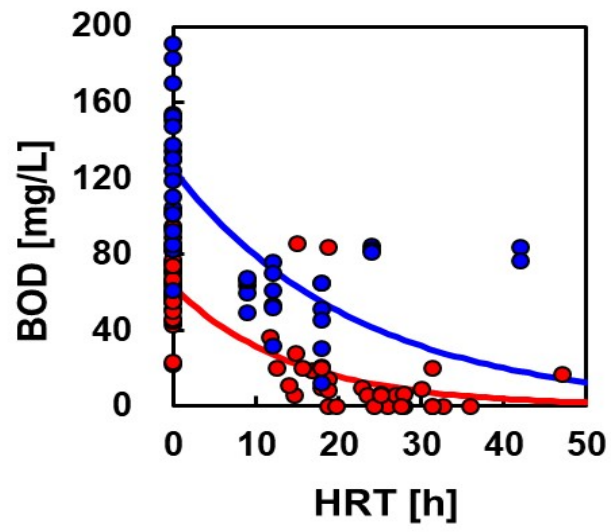

Supplemental Figure S1. Comparison of BOD removal by MFCs with and without partial aeration.

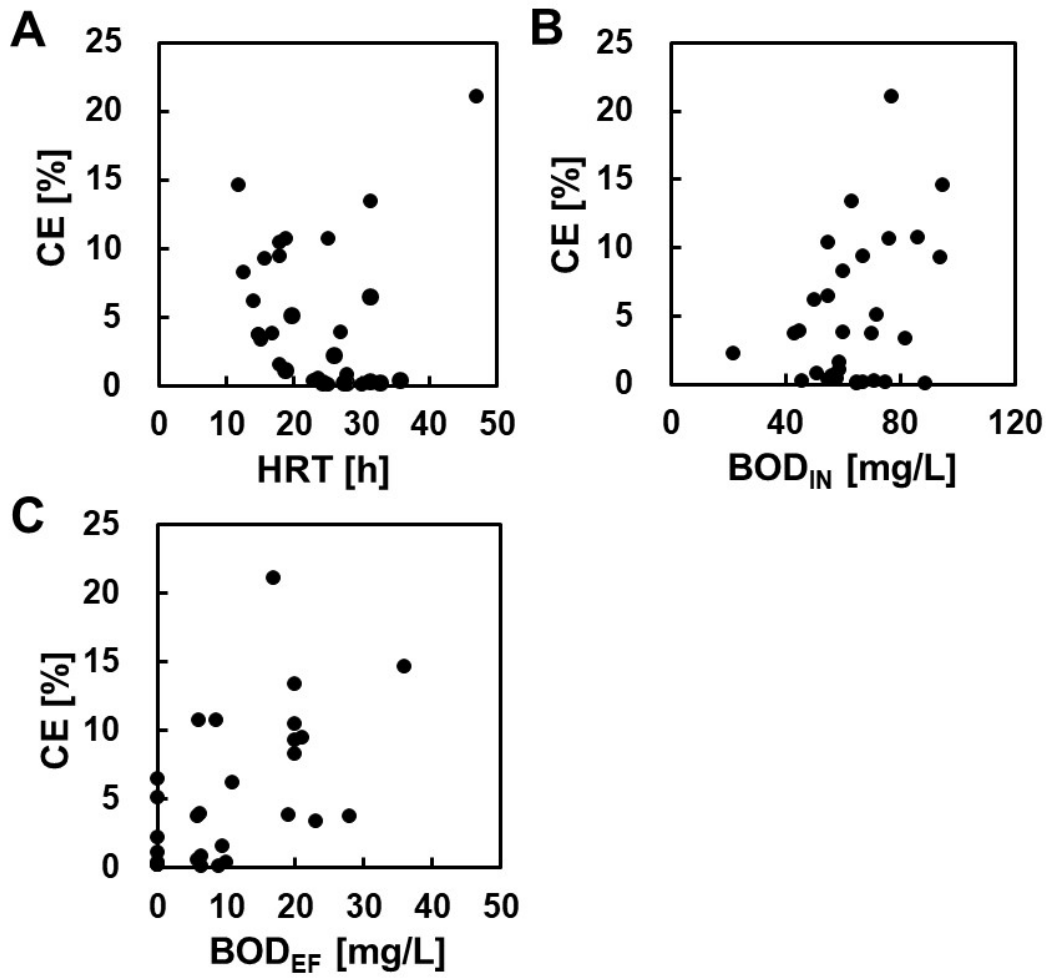

Supplemental Figure S2. Relationships between CE and the three parameters: HRT (A), BOD_{IN} (B), and BOD_{EF} (C).

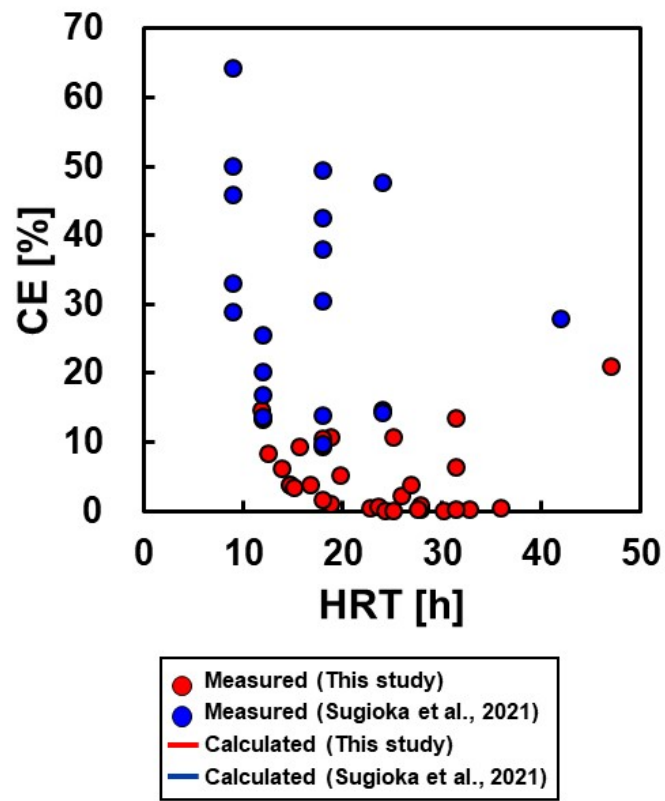

Supplemental Figure S3. Comparison of CE in MFCs with and without partial aeration.