

# **N-doped carbon nanoparticles on highly porous carbon nanofiber electrodes for sodium ion batteries**

**Meltem Yanilmaz<sup>1,2\*</sup>, Bülin Atıcı<sup>1</sup>, Jiadeng Zhu<sup>3</sup>, Ozan Toprakci<sup>4</sup>, Juran Kim<sup>5\*</sup>**

<sup>1</sup> Nano-Science and Nano-Engineering Program, Graduate School of Science, Engineering and  
Technology, Istanbul Technical University, Istanbul 34469, Turkey

<sup>2</sup> Textile Engineering, Istanbul Technical University, Istanbul 34469, Turkey


<sup>3</sup> Oak Ridge National Laboratory, Chemical Sciences Division, Oak Ridge, TN 37831, USA

<sup>4</sup> Yalova University, Department of Polymer Materials Engineering, 77200 Yalova, Turkey


<sup>5</sup> Advanced Textile R&D Department, Korea Institute of Industrial Technology (KITECH),  
Ansan 15588, Korea

**Table S1** Capacity and CE values

Electrodes	First cycle Capacity, mAh/g	Initial Coulombic efficiency, %	Capacity retention, %
CNF	197	48	90
PCNF1	283	48	93
PCNF2	350	54	94
PCNF3	325	54	87
N-PCNF4	402	66	97
N-PCNF5	392	54	97

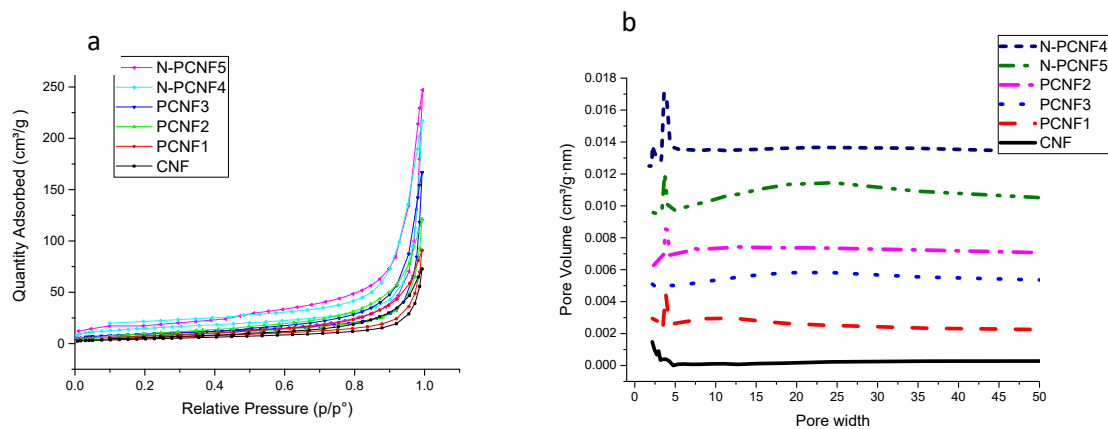

**Figure S1**  $N_2$  adsorption/desorption isotherms (a), and pore size distributions (b).

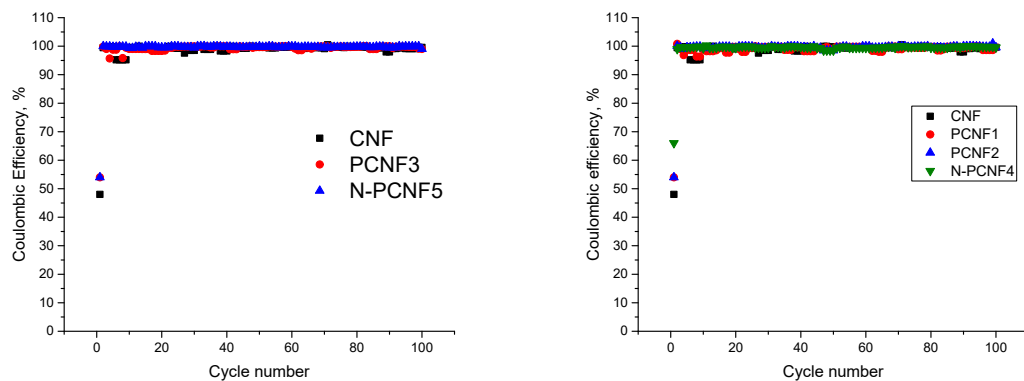

**Figure S2** Coulombic Efficiencies of of CNF, PCNF1, PCNF2, PCNF3, N-PCNF4 and N-PCNF5 electrodes.