High Mass Loading Flexible Electrode with Sheet-like Mn₃O₄/NiMoO₄@NiCo LDH on Carbon Cloth for supercapacitor

Ruibin Liang^{‡a}, Si Liu^{‡a}, Jianrong Lin^a, Jingfei Dai^a, Jingyi Peng^a, Peiyuan Huang^a, Jianwen Chen^b,

Peng Xiao^{a*}

a Guangdong-Hong Kong-Macao Joint Laboratory for Intelligent Micro-Nano Optoelectronic Technology, School of Physics and Optoelectronic Engineering, Foshan University, Foshan 528225, China;

b School of Electronic and Information Engineering, Foshan University, Foshan, 528000, China

*Correspondence: <u>xiaopeng@fosu.edu.cn.</u>

‡ These authors contributed equally to this work.

Supplementary data




Figure S1 XPS spectrum of the MO/NMO/NiCo LDH

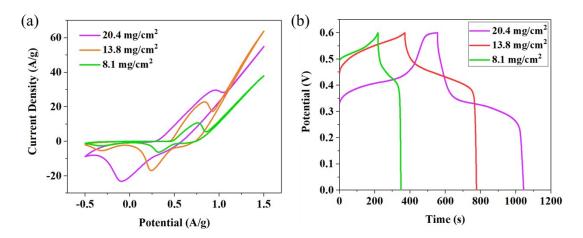


Figure S2 curves of MO/NMO/NiCo LDH with different mass loading (a) CV; (b) GCD

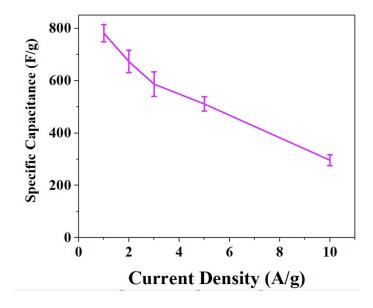


Figure S3 error bars of the specific capacitance of MO/NMO/NiCo LDH at different current

density

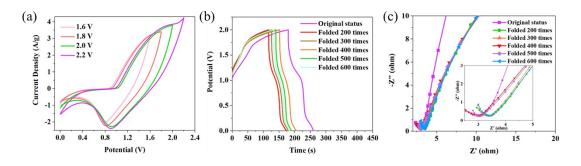


Figure S4 (a) CV curves of the FSC at 50 mV/s with different potential window; (b) GCD curves of the FSC at different bending condition; (d) EIS curves of the FSC at different bending condition

	Original status	Folded	Folded	Folded	Folded	Folded
		200 times	300 times	400 times	500 times	600 times
CV curve	3.768	2.509	2.487	2.525	2.576	2.543
area						

Table S1 CV curve area of each status at the scan rate of 50 mV/s