

Boosting photocurrent of anodized Nb₂O₅ by synergetic post-synthesis electrochemical treatment

(Supplementary Information)

Wallas T. Menezes^a, Roger Gonçalves^a and Ernesto C. Pereira^{a*}

SI.1 – 3D Topology

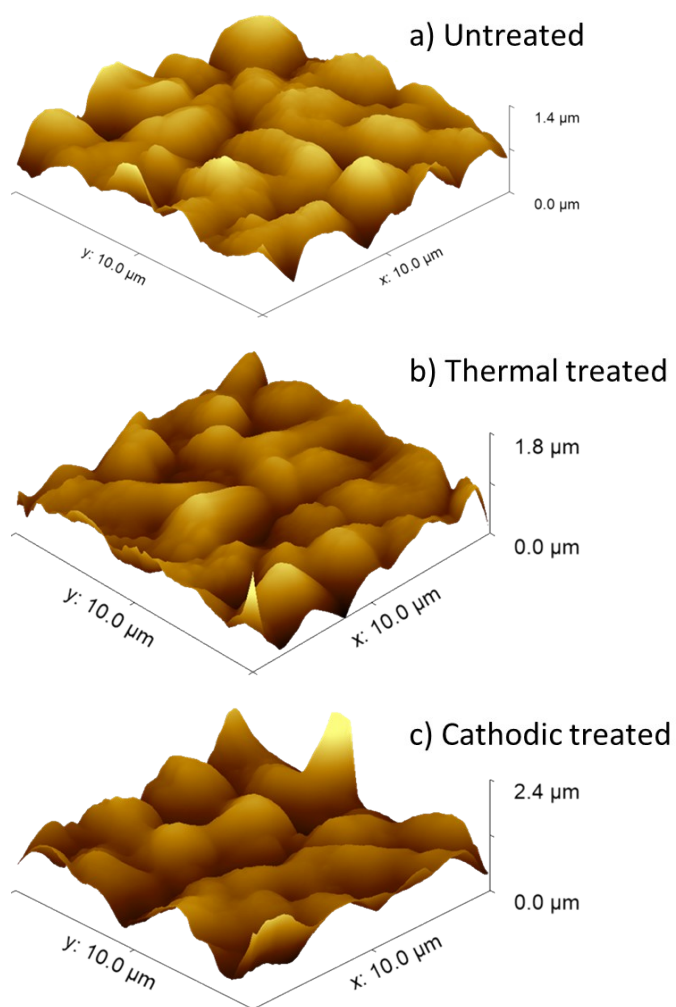


Fig.S.I. 1: 3D topographies of the samples: a) Untreated, b) Thermal treated, and c) Cathodic treated. Obtained by AFM in intermittent mode.