

SUPPORTING INFORMATION

Enhancing the efficiency of Asymmetric Supercapacitors using high performances Fe-Doped CoWO₄ electrodes

T. Kamalesh ^{a,1}, Palanisamy Rajkumar ^{b,1}, Sethuraman Venkatesan ^c, Akshaya Subhramaniyan Rasappan ^d, Adel El-marghany ^e, Sankaiya Asaithambi ^{f,*}, Jinho Kim ^{b,*}

^a Department of Physics, B. S. Abdur Rahman Crescent Institute of Science and Technology, Chennai, Tamil Nadu, 603210, India.

^b Department of Mechanical Engineering, Yeungnam University, Gyeongsan-si, Gyeongbuk-do 38541, Republic of Korea.

^c Research and Development, New Energy Technology Centre, Lithium-Ion Division, Amara Raja Battery Ltd., Karakambadi, Tirupati, Andhra Pradesh, 517520, India

^d Materials Design Division, Department of Physics, Chemistry and Biology (IFM), Linköping University, Linköping, Sweden.

^e Department of Chemistry, College of Science, King Saud University, P.O. Box 2455, Riyadh 11451, Saudi Arabia

^f Nanotechnology & Advanced Materials Engineering, Sejong University, 209 Neungdong-ro, Gwangjin-gu, Seoul, 143-747, Republic of Korea.

*E-mail: asaithambi901@gmail.com (SA); jinho@ynu.ac.kr (JK)

¹ These authors contributed equally to this work.

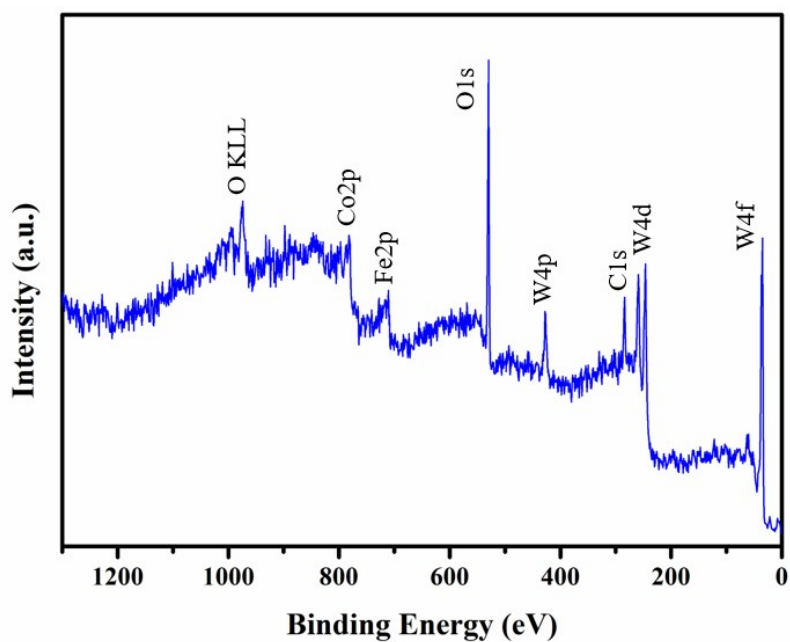


Figure S1: XPS survey spectrum of the prepared Fe-CoWO₄ sample

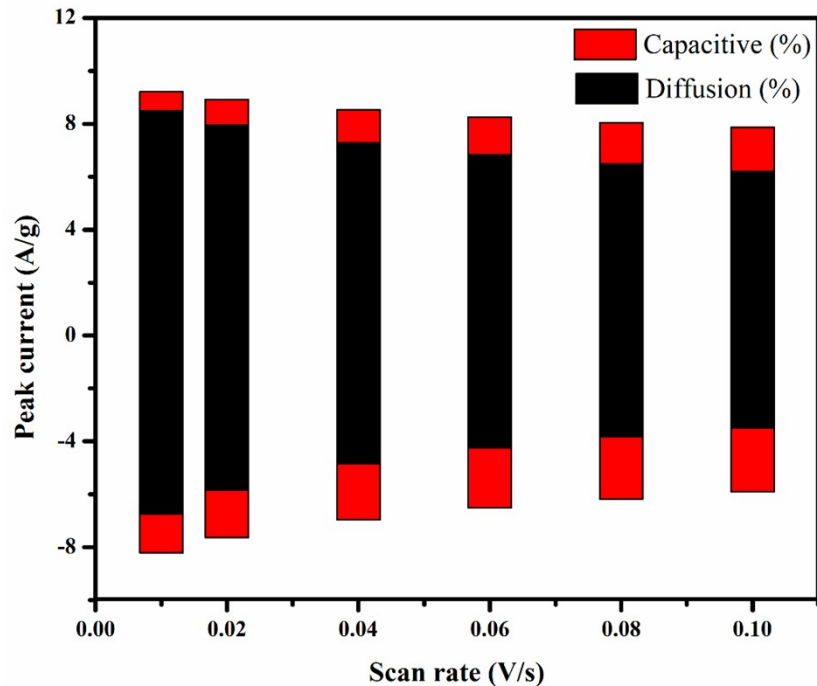


Figure S2: Contribution ratio of diffusion-controlled and capacitive-controlled processes of Fe-CoWO₄ electrode