

Supercritical Fluid Processing of Mesoporous Crystalline TiO₂ Thin Films for Highly Efficient Dye-Sensitized Solar Cells

Mingdeng Wei,^a Kaixue Wang,^b Masatoshi Yanagida,^c Hideki Sugihara,^c Michael A. Morris,^b Justin D. Holmes^{*b}
and Haoshen Zhou^{*ac}

^a Japan Science and Technology Agency (JST), Light and Control Research Group, PRESTO, Kawagoe, Saitama 3320012, Japan

^b Materials Section & Supercritical Fluid Centre, Department of Chemistry, University College Cork, Cork, Ireland. Fax: (+353) 21-4274097, E-mail: j.holmes@ucc.ie

^c Energy Technology Research Institute, National Institute of Advanced Industrial Science and Technology (AIST), AIST Tsukuba Centre, Ibaraki 305-8568, Japan. Fax: +81-29-8615799, E-mail: hs.zhou@aist.go.jp

Supporting information

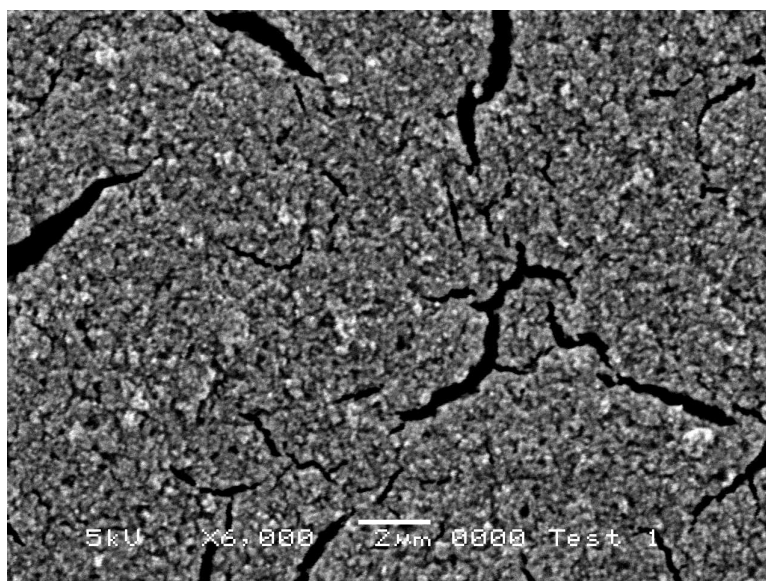


Figure S1 SEM image of mesoporous titania film with a thickness of about 2.6 µm showing the cracked surface.