

Journal of Materials Chemistry

Supporting Information

For

**Highly efficient tandem white organic light-emitting diodes
based upon C₆₀/NaT4 organic heterojunction as charge
generation layer**

Yonghua Chen, Hongkun Tian, Jiangshan Chen, Yanhou Geng, Donghang Yan,

Lixiang Wang and Dongge Ma *

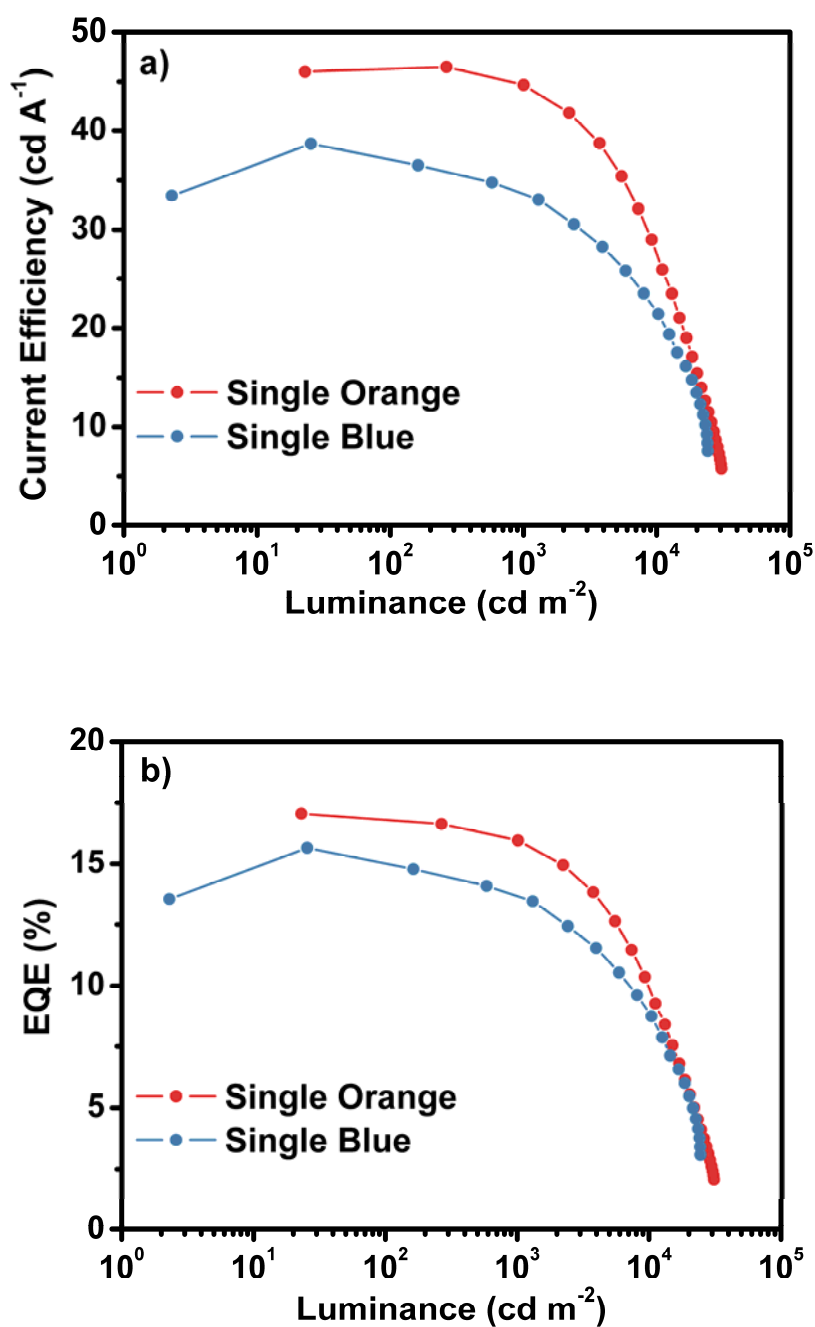


Fig. S1. a) Current and b) EQE versus luminance characteristics of single orange and blue devices. The single orange device structure is: ITO/TCTA: MoO₃ (40 nm)/TCTA (10 nm)/TCTA: (fbi)₂Ir(acac) (8 wt%) (30 nm)/TPBi (10 nm)/TPBi: Li₂CO₃ (30 nm)/LiF (1 nm)/Al (120 nm). The single blue device structure is: ITO/TCTA: MoO₃ (70 nm)/TCTA (10 nm)/TCTA: FIrpic (8 wt%) (20 nm)/TPBi (10 nm)/TPBi: Li₂CO₃ (30 nm)/LiF (1 nm)/Al (120 nm).