

Electrospun carbon nanofibrous mats surface-decorated with Pd nanoparticles via the supercritical CO₂ method for sensing of H₂

Yong Zhao, Xiaoxu Wang, Chuilin Lai, Guangfei He, Lifeng Zhang, Hao Fong and Zhengtao Zhu

Department of Chemistry, South Dakota School of Mines and Technology, Rapid City, SD 57701

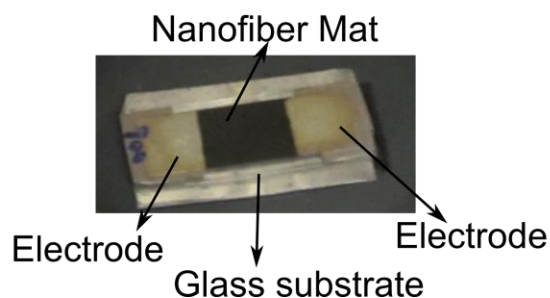
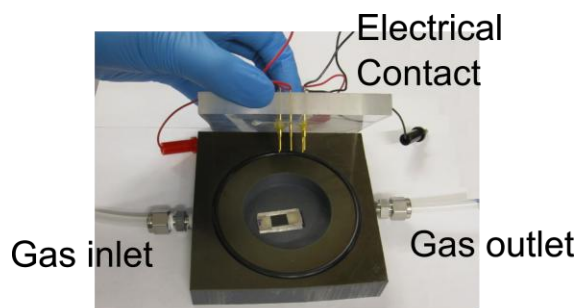


Figure S1: Images of the set-up for the sensing test.

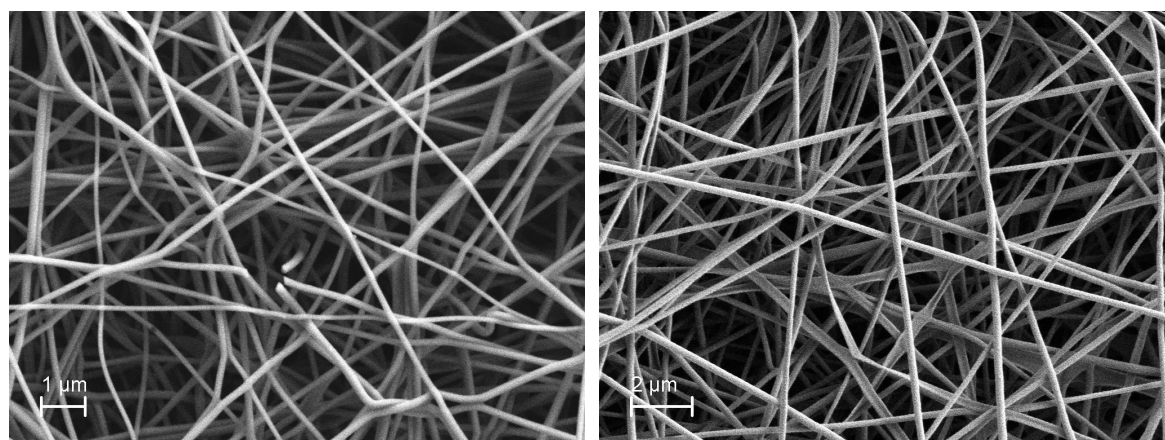


Figure S2: SEM images showing the representative morphologies of electrospun carbon nanofibrous mats prepared at the carbonization temperature of 700 °C (left) and 900 °C (right).