

ZnS nanowall coated Ni composites: facile preparation and enhanced electromagnetic wave absorption

Biao Zhao ^a, Gang Shao ^a, Bingbing Fan ^a, Wanyu Zhao ^a, Yajun Xie ^a, Rui Zhang ^{a,b*}

^a School of Materials Science and Engineering, Zhengzhou University, Zhengzhou, Henan 450001, PR China

^b Zhengzhou Aeronautical Institute of Industry Management, Zhengzhou, Henan 450046, PR China

* Corresponding Author.

Prof. Rui Zhang

Tel: +86-371-60632007

Fax: +86-371-60632600

E-mail address: zhangray@zzu.edu.cn.

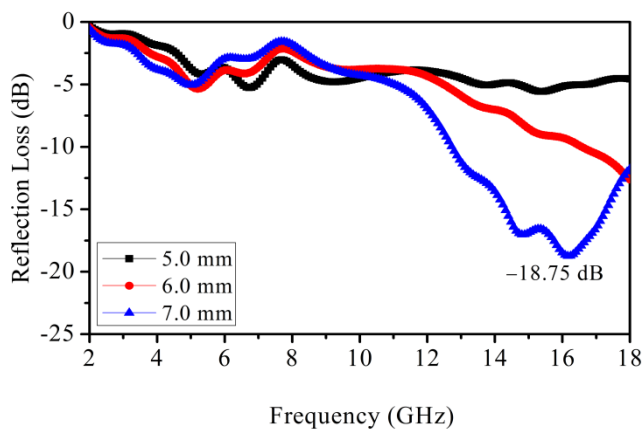


Fig.S1. The reflection loss of Ni@ZnS paraffin-composite at different thicknesses (5mm, 6mm, 7mm) in the frequency range of 2-18 GHz

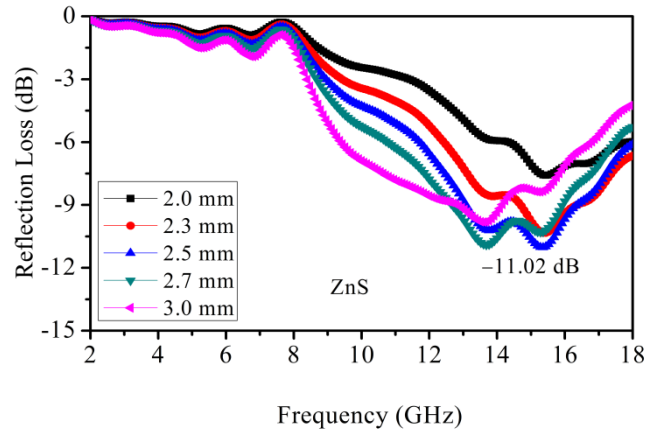


Fig.S2. Reflection loss curves of 70wt% ZnS paraffin-composite at various thicknesses in the frequency of 2-18 GHz.